

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US05/010850

International filing date: 30 March 2005 (30.03.2005)

Document type: Certified copy of priority document


Document details: Country/Office: GB
Number: 0502057.3
Filing date: 01 February 2005 (01.02.2005)

Date of receipt at the International Bureau: 20 June 2005 (20.06.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



23 MAY 2005



PCT/US 05/10850



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

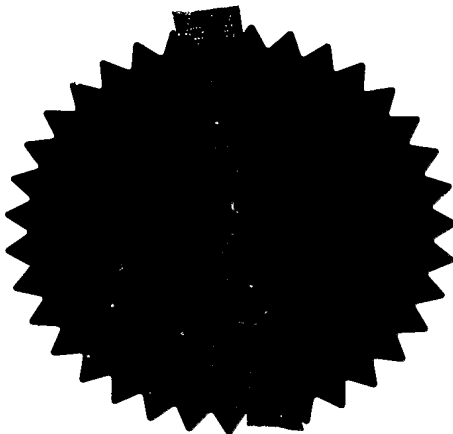

Signed

Stephen Hordley

Dated 26 April 2005



1 FEB 2005

The
Patent
Office

02FEB05 E959892-1 D03312

P01/77FEE 30.00-0502057.3 ACCOUNT C

Request for grant of a patent


(An explanatory leaflet on how to fill in this form is available from the Patent Office)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Application number GB

0502057.3

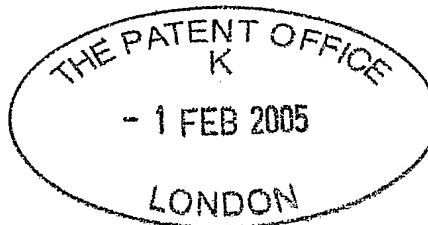

1. Your reference:
(optional)

GBP91718

2. Full name, address and postcode of the applicant
or of each applicant (*underline all surnames*):

Sun Chemical Limited,
St. Mary Cray
Orpington
Kent BR5 3PP
United Kingdom

Patents ADP number (if you know it):

If the applicant is a corporate body, give the
country/state of its incorporation:

United Kingdom

08667743001

3. Title of the invention:

Photoinitiators for use in intaglio printing inks

4. Name of your agent (*if you have one*):

Marks & Clerk

"Address for service" in the United Kingdom
to which all correspondence should be sent
(*including the postcode*)

90 Long Acre
London WC2E 9RA

Patents ADP number (*if you know it*):

18001 ✓

5. Priority declaration: Are you claiming
priority from one or more earlier-filed
patent applications? If so, please give
details of the application(s):

Country

Application Number
(if you know it)

Date of filing
(day / month / year)

6. Divisionals etc: Is this application a
divisional application, or being made
following resolution of an entitlement
dispute about an earlier application? If
so, please give the application number
and filing date of the earlier application:

Number of earlier UK application

Date of filing
(day / month / year)

7. Inventorship: (Inventors must be individuals not companies)

(Please tick the appropriate boxes)

Are all the applicants named above also inventors?

YES

☐

NO

☒

If yes, are there any other inventors?

YES

☐

NO

☒

8. Are you paying the application fee with this form?

YES

☒

NO

☐

9. Accompanying documents: not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form:

0

Description:

18 ✓

Claim(s):

8 ✓

Abstract:

1 + 1 R

Drawing(s):

If you are not filing a description, please give details of the previous application you are going to rely upon:

Country

Priority application No
(if you know it)

Date of filing
(day / month / year)

10. If you are also filing any of the following, state how many against each item:

Priority documents

1 ✓

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*):

Request for search (*Patents Form 9/77*):

1 ✓

Request for substantive examination (*Patents Form 10/77*):

Any other documents
(please specify):

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

Marks & Clerk

Date: 1 February 2005

12. Name, e-mail address, telephone, Fax and/or mobile number, if any, of a contact point for the applicant

Natural Sciences Formalities
020 7420 0000

PHOTOINITIATORS FOR USE IN INTAGLIO PRINTING INKS

The present invention relates to the use of certain acylphosphine oxides as
5 photoinitiators in energy-curable (e.g. ultraviolet-curable) intaglio printing inks.

Security documents are preferably printed by the intaglio printing process. The
term "intaglio printing" as used in this application refers to the so-called "engraved steel
die" or "copper plate" printing processes which are well known to those skilled in the
art. The printing plates used herein are usually chromium plated, engraved nickel plates
10 or cylinders, made by galvanic replication of an - often hand-engraved - original copper
plate. The following does not apply to the also well known rotogravure or gravure
printing processes, which rely on a different type of ink.

In intaglio printing, ink is applied under pressure to the engraved surface of a
cylinder. Thus, not only does the ink fill the engravings of the cylinder, it is also
15 applied to the planar non-image surface of the cylinder. The ink is then thoroughly
wiped from the planar surface of the engraved cylinder before the printing process is
carried out. This is commonly effected by a wiping cylinder contrarotating to the
engraved cylinder so that the two surfaces which touch are moving in opposite
directions. Given the right conditions and, crucially, the right ink, this will remove the
20 surplus ink from the planar surface as well as a small amount of ink from the surface of
the ink in the engravings, so that the only ink on the engraved cylinder is in the
engravings. The substrate to be printed is then passed between the engraved cylinder
and an impression material, which is typically another cylinder, with the application of
considerable pressure between the engraved cylinder and the impression material, which
25 is a hard but deformable material. The considerable pressure deforms the impression
material, forcing the substrate to be printed into the engravings on the engraved
cylinder. This results in the substrate picking up some ink, corresponding to the
engravings on the surface of the engraved cylinder. The ink then has to be dried.

Because of the unique characteristics of intaglio printing, the inks used for other forms of printing, for example lithographic printing, cannot be used for intaglio, and the formulations tend to be completely different.

5 Plainly, the rheology of the ink is critical to its success. For oil based intaglio inks, the addition of organic solvent permits adjustment of rheology, and at the same time facilitates wiping of the excess ink from the non-image areas of the plate. Such solvents are not used in energy curable inks which are therefore tackier, and require the use of plasticiser to achieve the same effect.

10 In addition to the rheology and ease of removal of surplus ink, discussed above, intaglio printing inks must meet the following requirements:

They must remain on the engraved cylinder until the moment of printing when they must transfer readily and in a consistent manner to the substrate to be printed.

15 They must have good film-forming properties and the cured inks must be sufficiently flexible that they remain intact even when the printed matter (e.g. banknotes) is subject to abuse.

Once the substrate has been printed, the ink must not transfer back to other surfaces with which it may come into contact, especially other printed matter.

20 The cured ink must have excellent chemical and mechanical resistance so as to withstand the many diverse materials and conditions to which banknotes may be subject.

They must be safe for handling by all members of the public, including the very young.

25 It is also self-evident that, where the ink is to be cured by energy, e.g. ultraviolet or electron beam, any components added to the ink to achieve any of the above requirements must not interfere with the cure. Not surprisingly, it is difficult to meet all of these desiderata simultaneously.

The majority of intaglio inks in current use are printed on sheetfed presses. The main drying mechanism is by oxidation of the resin and oil component in the stack of printed matter, a process that typically takes several days to become substantially complete. This drying process has the disadvantage that wet ink can transfer to the
5 unprinted side whilst the stack is being built, or, indeed, may transfer as a consequence of any movement of the stack during the period in which oxidative drying is taking place. Such a transfer of ink to the unprinted side is known in the industry as "set-off", and is normally considered a fault.

As a result, energy-curable, and specifically, ultraviolet (UV)-curable intaglio
10 printing inks have been proposed. The use of a vehicle system that can be cured under the action of UV light offers immediate drying and eliminates the occurrence of set-off. For example, GB1466470 discloses a UV-curable ink for copperplate intaglio printing which comprises specific amounts of a curable binder which is an ester or amide of acrylic acid, a pigment, a photoinitiator, an activator for the photoinitiator and an inert
15 extender permeable to ultraviolet light. EP1,260,593 discloses UV intaglio ink formulations which are water-washable and which can easily be precipitated from the wiping solution at the post-wiping stage.

However, the main practical use nowadays of intaglio printing is security printing, for example of banknotes, and this commonly requires that the ink used should
20 not fluoresce in the visible region under UV light. Specifically, banknotes are commonly printed on non-fluorescing paper and so a first test to determine if a note is counterfeit is to place it under a UV source. If the note fluoresces blue, it is almost certainly counterfeit. Against this background the printer has the option of applying inks that themselves either do or do not fluoresce, or indeed a combination of both
25 types. Thus, in order to make best use of the security possibilities, it is important that the ink maker has sufficient flexibility of formulation to produce both fluorescent and non-fluorescent inks. Since the photoinitiator combinations proposed for use in the above patents do fluoresce in the visible region under UV light, this precludes the production of non-fluorescing inks, and the formulations cannot, therefore, in practice
30 be used for a large number of the applications for which they would otherwise be expected to be useful.


We have now surprisingly found that acylphosphine oxide photoinitiators, which are free radical photoinitiators, do not fluoresce in the visible region under UV light and so can be used in energy-curable intaglio printing inks for security applications.

Acylphosphine oxides are known for use as photoinitiators in various other types of printing ink. For example, US 6,777,459 B2 describes the use of compositions with mono and bis acyl phosphine oxides, and describes their applicability to UV curing inks, including screen print, flexographic, gravure and off-set printing inks. US 4,710,523 and US 4,298,738 describe some acylphosphine oxides and their use as photoinitiators in photopolymerisable surface coatings, finishes and printing inks. However, they do not suggest that these compounds may be used in intaglio printing inks, nor that the resulting inks do not fluoresce in the visible region under UV light.

Thus, the present invention consists in an energy curable intaglio printing ink, curing by free radical acrylate chemistry, and including a photoinitiator comprising an acylphosphine oxide, whereby the ink does not fluoresce in at least the visible light wavelength region when exposed to ultraviolet light.

"The visible light region" of the spectrum is that region normally visible to humans, and is generally in the range from 400 to 700nm.


A preferred class of compounds for use in the present invention are those compounds of formula (I):

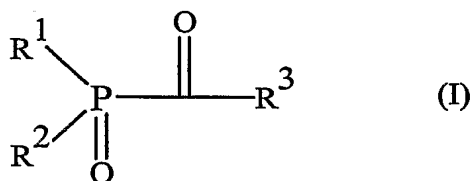


in which:

R^1 and R^2 are independently selected from $\text{C}_1 - \text{C}_{12}$ alkyl groups, $\text{C}_3 - \text{C}_7$ cycloalkyl groups, aryl groups, aralkyl groups, heterocyclic groups having from 3 to 7 ring atoms, of which at least one is a sulphur or nitrogen atom and groups of formula $-\text{COR}^3$;

or R^2 represents a group of formula $-OR^4$, where R^4 represents a $C_1 - C_6$ alkyl group, an aryl group, an aralkyl group or a cationic group or atom, or R^2 represents a group of formula (II):

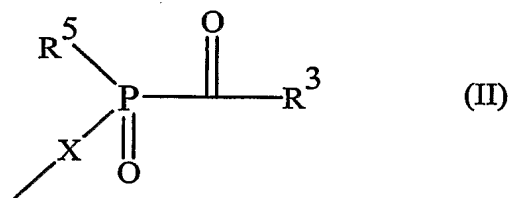

- 5 where X represents a $C_1 - C_{18}$ alkylene group or a biphenyldiyl group, and R^5 represents any of the groups represented by R^1 or a group of formula $-OR^4$; and R^3 represents a $C_1 - C_6$ alkyl group, an aryl group, a heterocyclic group having from 3 to 7 ring atoms, of which at least one is a sulphur or nitrogen atom, or a group of formula (IV):

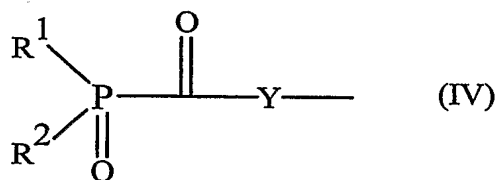

10

where Y represents a $C_1 - C_{18}$ alkylene group a phenylene group, a cyclohexylene group or a biphenyldiyl group.

- In the compounds of formula (I), where R^1 and/or R^2 represents an alkyl group, this may be a straight or branched chain alkyl group having from 1 to 12 carbon atoms. Examples of such groups include the methyl, ethyl, propyl, isopropyl, butyl, isobutyl, sec-butyl, t-butyl, pentyl, isopentyl, neopentyl, hexyl, isohexyl, heptyl, octyl, nonyl, decyl, undecyl and dodecyl groups. Of these groups, we particularly prefer those having from 1 to 8 carbon atoms, more preferably from 1 to 6 carbon atoms. The most preferred groups are those having from 1 to 4 carbon atoms. Where R^3 and/or R^4 represents an alkyl group, this may be a straight or branched chain group having from 1

20

to 6, preferably from 1 to 4, carbon atoms and examples of such groups include those listed above having that number of carbon atoms.

Where R^1 and/or R^2 represents a cycloalkyl group, this has from 3 to 7 ring carbon atoms, and examples include the cyclopropyl, cyclobutyl, cyclopentyl, cyclohexyl and cycloheptyl groups, of which the cyclopentyl and cyclohexyl groups are preferred.

Where R^1 and/or R^2 and/or R^3 and/or R^4 represents an aryl group, this is a group having, preferably, from 6 to 14 carbon atoms in an aromatic carbocyclic ring, and examples include the phenyl, naphthyl, anthryl and phenanthryl groups, of which the phenyl group is preferred. Such groups may be substituted or unsubstituted. If substituted, there is no particular restriction on the number of substituents, other than those imposed by the number of substitutable carbon atoms, and possibly by steric constraints, however, in general, from 1 to 4, more preferably from 1 to 3, substituents would be common. Examples of suitable substituents include the halogen atoms (e.g. chlorine, fluorine, bromine or iodine atoms), $C_1 - C_6$ alkyl groups (e.g. those alkyl groups having from 1 to 6 carbon atoms included in the examples of alkyl groups represented by R^1 and/or R^2), $C_1 - C_6$ alkoxy groups, $C_1 - C_6$ alkylthio groups, and aryl groups (e.g. as exemplified here, and which may be substituted or unsubstituted, as defined here, provided that any aryl substituent may not itself be further substituted by an aryl group).

Where the substituent(s) on an aryl group is an alkoxy group, this may be a straight or branched chain group having from 1 to 6 carbon atoms, of which examples include the methoxy, ethoxy, propoxy, isopropoxy, butoxy, isobutoxy, sec-butoxy, t-butoxy, pentyloxy, isopentyloxy, neopentyloxy and hexyloxy groups.

Where the substituent(s) on an aryl group is an alkylthio group, this may be a straight or branched chain group having from 1 to 6 carbon atoms, of which examples include the methylthio, ethylthio, propylthio, isopropylthio, butylthio, isobutylthio, sec-butylthio, t-butylthio, pentylthio, isopentylthio, neopentylthio and hexylthio groups.


Where R^1 and/or R^2 and/or R^4 represents an aralkyl group, this may be an alkyl group, preferably having from 1 to 4 carbon atoms, which is substituted by from 1 to 3 aryl groups, which may be as defined and exemplified above. Preferred examples of such aralkyl groups include the benzyl, benzhydryl, trityl, phenethyl, 1-phenylethyl, 3-phenylpropyl, 4-phenylbutyl and naphthylmethyl groups, of which the benzyl group is preferred.

Where R^1 and/or R^2 and/or R^3 represents a heterocyclic group, this has from 3 to 7 ring atoms, of which at least one, and preferably 1 or 2, more preferably 1, is a nitrogen atom or a sulphur atom. More preferably, the group has 5 or 6 ring atoms, preferably of which one is a nitrogen or sulphur atom. examples of such groups include the thienyl, furyl, pyranyl, pyrrolyl, imidazolyl, pyrazolyl, pyridyl, pyrazinyl, pyrimidinyl, pyrrolidinyl, pyrrolinyl, imidazolidinyl, imidazolinyl, piperidyl, piperazinyl and morpholinyl groups, of which the thienyl and pyridyl groups are preferred.

Where R^4 represents a cationic group or atom, this may be, for example, an ammonium group, or a metal atom $(M)^+_x$, where M is a metal, e.g. sodium, potassium or lithium, and x is the reciprocal of the valence of the metal M.

Where X or Y represents an alkylene group, this may be a straight or branched chain group having from 1 to 18 carbon atoms, and examples include the methylene, ethylene, trimethylene, propylene, tetramethylene, pentamethylene, hexamethylene, heptamethylene, octamethylene, nonamethylene, decamethylene, undecamethylene, dodecamethylene, tridecamethylene, tetradecamethylene, pentadecamethylene, hexadecamethylene, heptadecamethylene, and octadecamethylene groups.

A particularly preferred class of acylphosphine oxides to be used in the present invention are those compounds of formula (V):

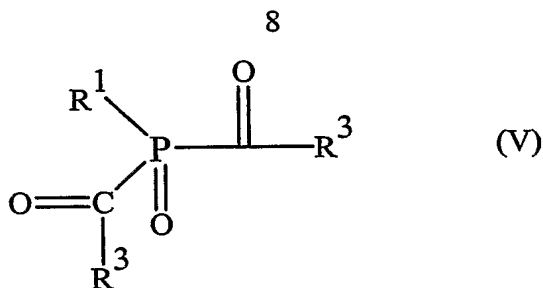

in which:


R^1 represents a $\text{C}_1 - \text{C}_{12}$ alkyl group, a cyclohexyl group or an aryl group; and

R^3 is as defined above.

- 5 We particularly prefer compounds of formula (V) in which each R^3 is independently selected from phenyl groups and phenyl groups having from 1 to 4 halogen and/or $\text{C}_1 - \text{C}_6$ alkyl and/or $\text{C}_1 - \text{C}_6$ alkoxy substituents.

- Also preferred are compounds of formula (V) in which R^1 represents a $\text{C}_1 - \text{C}_{12}$ alkyl group or a phenyl group which is unsubstituted or has from 1 to 3 $\text{C}_1 - \text{C}_6$ alkyl or alkoxy substituents.
- 10

Another particularly preferred class of acylphosphine oxides to be used in the present invention are those compounds of formula (VI):

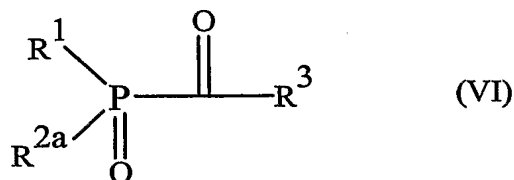


in which:

- 15 R^1 and R^3 are as defined above; and

R^{2a} represents a $\text{C}_1 - \text{C}_{12}$ alkyl group, a $\text{C}_3 - \text{C}_7$ cycloalkyl group, an aryl group, an aralkyl group, a heterocyclic group having from 3 to 7 ring atoms, of which at least one is a sulphur or nitrogen atom, or a group of formula $-\text{OR}^4$, where R^4 is defined above.

The most preferred class of compounds of the present invention are those compounds of formula (VII):

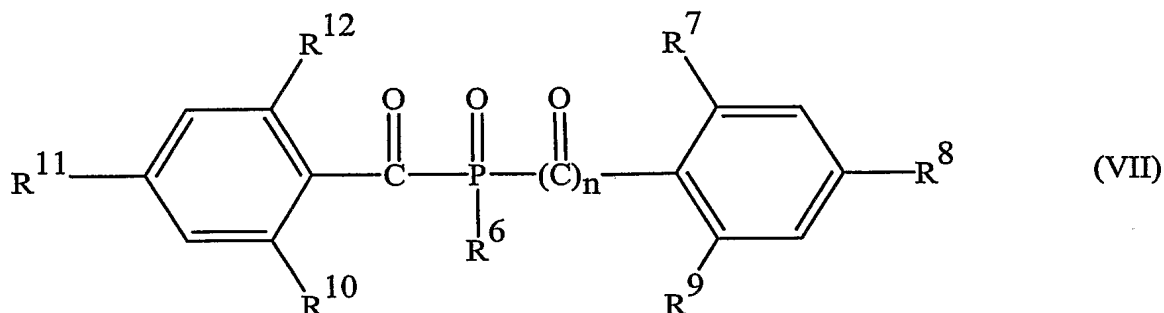

in which:

5 n is 0 or 1;

R^6 represents a $C_1 - C_{12}$ alkyl group, a $C_1 - C_6$ alkoxy group, a phenyl group or a phenyl group having from 1 to 4 substituents selected from $C_1 - C_6$ alkyl groups, $C_1 - C_6$ alkoxy groups and halogen atoms; and

10 $R^7, R^8, R^9, R^{10}, R^{11}$ and R^{12} are the same as or different from each other and each represents a hydrogen atom, a $C_1 - C_6$ alkyl group, a $C_1 - C_6$ alkoxy group or a halogen atom.

Specific examples of photoinitiators which may be used in the present invention include: methyl 2,6-dimethylbenzoyl-phenylphosphinate, methyl 2,6-dimethoxybenzoyl-phenylphosphinate, 2,6-dimethylbenzoyldiphenylphosphine oxide, 2,6-dimethoxybenzoyldiphenylphosphine oxide, methyl 2,4,6-trimethylbenzoyl-phenylphosphinate, ethyl 2,4,6-trimethylbenzoyl-phenylphosphinate, potassium (2,4,6-trimethylbenzoyl)-(2'-hydroxybiphenyl-2-yl)phosphinate, 2,4,6-trimethylbenzoyldiphenylphosphine oxide, 2,4,6-trimethoxybenzoyldiphenylphosphine oxide, 2,3,6-trimethylbenzoyldiphenylphosphine oxide, methyl 2,4,6-trimethylbenzoyl-tolylphosphinate, ethyl 2,6-dichlorobenzoyl-phenylphosphinate, 2,6-dichlorobenzoyldiphenylphosphine oxide, 2,6-dibromobenzoyldiphenylphosphine oxide, 2-chloro-6-methylthiobenzoyldiphenylphosphine oxide, 2,6-dimethylthiobenzoyldiphenylphosphine oxide, 2,3,4,6-

tetramethylbenzoyldiphenylphosphine oxide, 2-phenyl-6-methylbenzoyldiphenylphosphine oxide, methyl 2,4,6-trimethylbenzoyl-naphthylphosphinate, ethyl 2,4,6-trimethylbenzoyl-naphthylphosphinate, ethyl 2,6-dichlorobenzoyl-naphthylphosphinate, 1,3-dimethylnaphthalene-2-carbonyl-diphenylphosphine oxide, 1,3-

5 dimethoxynaphthalene-2-carbonyl-diphenylphosphine oxide, 1,3-dichloronaphthalene-2-carbonyl-diphenylphosphine oxide, 2,8-dimethylnaphthalene-2-carbonyl-diphenylphosphine oxide, 2,4,6-trimethylpyridine-3-carbonyldiphenylphosphine oxide, 2,4-dimethylfuran-3-carbonyldiphenylphosphine oxide, methyl 2,4,5-trimethylthiophene-3-

10 carbonyldiphenylphosphinate, 2,4,5-trimethylthiophene-3-carbonyldiphenylphosphine oxide, bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentyl-phosphine oxide and bis(2,4,6-trimethylbenzoyl)phenylphosphine oxide.

Other acylphosphine oxide photoinitiators may also be used, for example 1,10-bis[bis(2,4,6-trimethylbenzoyl)phosphine oxide]decane and a copolymer of 4-

15 acryloyloxy-2,6-dimethylbenzoyl-diphenylphosphine oxide and butyl acrylate.

The most preferred acylphosphine oxides are 2,4,6-trimethylbenzoyl diphenylphosphine oxide, bis(2,4,6-trimethylbenzoyl)phenyl phosphine oxide, ethyl 2,4,6-trimethylbenzoyl diphenylphosphinate and bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentylphosphine oxide.

20 These acylphosphine oxides are all known in themselves and may be prepared by known methods or by analogous methods to those known. They are described, for example in US Patents No 4,298,738, No 4,710,523 and No 6,777,459, the disclosures of which are incorporated herein by reference.

25 Although it is a feature of the present invention that the photoinitiator comprises an acylphosphine oxide, if desired, other photoinitiators can be used in addition, provided that they also do not result in a cured ink which fluoresces in the visible region under UV light. For example, it would be possible to use a hybrid free radical/cationic curing system, with the free radical photoinitiator being the acylphosphine oxides of the present invention, and a suitable cationic initiator.

The printing inks of the present invention are designed to be cured by UV or EB (electron beam) radiation and typically include a binder comprising one or more oligomers and/or reactive monomers. Formulations are well-known and can be found in standard textbooks such as the series "Chemistry & Technology of UV & EB Formulation for Coatings, Inks & Paints", published in 7 volumes in 1997-1998 by John Wiley & Sons in association with SITA Technology Limited.

Suitable oligomers (also referred to as prepolymers) include epoxy acrylates, acrylated oils, urethane acrylates, polyester acrylates, silicone acrylates, acrylated amines, acrylic saturated resins and acrylic acrylates. Further details and examples are given in "Chemistry & Technology of UV & EB Formulation for Coatings, Inks & Paints", Volume II: Prepolymers & Reactive Diluents, edited by G Webster, published in 1997 by John Wiley & Sons in association with SITA Technology Limited.

Because of the high viscosity of most oligomers, diluents are required to reduce the overall viscosity of energy curing ink or coating formulation, so as to assist in handling and application. Suitable diluents may include water or "reactive" monomers which are incorporated into the cured film. Reactive monomers are typically acrylates or methacrylates, and can be monofunctional or multifunctional. Examples of multifunctional monomers would include polyester acrylates or methacrylates, polyol acrylates or methacrylates, and polyether acrylates or methacrylates. Further details and examples are given in the book edited by G Webster (op. cit.).

To make inks suitable for the water wipe intaglio presses, the ink must be soluble in dilute caustic solutions. This can be achieved by using acid functional resins. These may be acrylate or methacrylate functional, and therefore reactive, or inert in UV and EB systems. Suitable examples include styrene maleic anhydride resins, such as SMA1440F available from Cray Valley, and aromatic acid methacrylate and acrylate half esters.

The inks will contain pigments as the colouring agent. The pigment may be any desired inorganic and/or organic pigment suitable for intaglio printing such as CI Pigment Yellow 12, CI Pigment Yellow 42, CI Pigment Yellow 93, CI Pigment Yellow 110, CI Pigment Yellow 173, CI Pigment Black 7, CI Pigment Black 11, CI Pigment

Orange 34, CI Pigment Red 9, CI Pigment Red 22, CI Pigment Red 23, CI Pigment Red 57:1, CI Pigment Red 67, CI Pigment Red 122, CI Pigment Red 146, CI Pigment Red 185, CI Pigment Red 224, CI Pigment Red 242, CI Pigment Red 254, CI Pigment Green 7, CI Pigment Green 36, CI Pigment Blue 15, CI Pigment Blue 15:3, CI Pigment Violet 23, CI Pigment Violet 32, or CI Pigment Violet 37.

Preferably, the ink will contain one or more fillers (also called extenders) in an amount of about 1-35% based on the weight of the finished ink. Suitable fillers include china clay, calcium carbonate, calcium sulphate, talc, silica, corn starch, titanium dioxide, alumina and mixtures thereof.

The ink may also contain about 1 to 5%, based on the weight of the finished ink, of a wax to improve scuff resistance. Suitable waxes include carnauba waxes, montan waxes, polytetrafluoroethylene waxes, polyethylene waxes, Fischer-Tropsch waxes, silicone fluids and mixtures thereof.

Other additives may be incorporated in the ink, including adhesive reagents, antifoaming reagents, levelling reagents, flow reagents, antioxidants, ultraviolet absorbers, flame retardants, etc.

In addition, if desired, a plasticiser may be incorporated into the printing ink in order to facilitate the wiping process to remove surplus ink from the engraved cylinder. Examples of suitable plasticisers include:

Citrates, for example: acetyl tri(2-ethylhexyl) citrate, acetyl tributyl citrate, acetyl triethyl citrate, tributyl citrate, tricyclohexyl citrate, triethyl citrate, and triisoamyl citrate;

Epoxidised oils, fatty acids and esters thereof, for example: 2-ethylhexyl esters of epoxidised tall oil, epoxidised linseed oil, epoxidised soya fatty acid ethylhexyl ester, epoxidised soybean oil,

Fatty acids, which may be saturated or unsaturated, especially those having a molecular weight within the preferred range given above, for example hexanoic, octanoic, decanoic, lauric acid, myristic acid, palmitic acid, stearic acid, arachidic acid, behenic acid, lignoceric acid, lauroleic acid (dodecenoic acid), pentadecanoic acid,

margaric acid, myristoleic acid, palmitoleic acid, oleic acid, gadoleic acid (eicosenoic acid), erucic acid, ricinoleic acid, linoleic acid, linolenic acid, licanic acid, eleostearic acid (octadec-9,11,13-trienoic acid), octadecatetraenoic acid, and octadecatraenoic acid.

Combinations of these fatty acids, especially mixtures found in nature, such a
5 linseed oil fatty acid or tall oil fatty acid;

Sebacates, for example: sebacic acid 1,2-propanediol polyester, di-2-ethylhexy
sebacate, dibutyl sebacate, and dioctyl sebacate; and

Tall oil esters, for example: hexyl tallate, 2-ethylhexyl tallate, isooctyl tallate,
and octyl epoxy tallate;

10 In order to function properly as an intaglio printing ink, the viscosity of the ink
should preferably be controlled within certain limits. Specifically, we prefer that the
viscosity of the inks measured at 26°C and a shear rate of 100 sec⁻¹ should be in the
range 20 - 200 Pascal seconds, more preferably 50 - 125 Pascal seconds.

The invention also provides a method of producing a document, which
15 comprises intaglio printing on a substrate which does not fluoresce in at least the visible
region under ultraviolet light using an intaglio printing ink which includes a
photoinitiator comprising an acylphosphine oxide, and curing the ink by exposure to a
source of radiant energy.

The substrate is preferably a paper.

20 The method of the present invention is particularly suitable for the printing of
security documents, such as banknotes. In this case, the paper or other substrate will be
chosen from those materials commonly known for use as such documents.

The inks of the present invention can be used on standard intaglio presses fitted
with UV lamps, and with a plate temperature of around 40°C.

25 The invention is further illustrated by the following non-limiting Examples.

EXAMPLES

The ingredients shown in the following Table 1 were weighed and mixed to form a paste. The paste was then fully mixed and dispersed using a three roll mill to produce a homogeneous, viscous paste ink, Mixture A.

5

Table 1

Material	Amount (wt %)	Supplier
Ebecryl 648 (epoxy acrylate)	51.3	UCB chemicals
Tripropylene glycol diacrylate (TPGDA)	1.1	Cray Valley
Chromophtal LGLD (blue pigment)	6.8	Ciba
Precipitated CaCO ₃	33.4	Omya
Corn Starch	2.5	Cerestar
Carnauba wax	3.7	Eggar
Florstab UV-1 (UV stabiliser)	1.2	Kromachem
Total	100	

Photoinitiator solutions were made by dissolving the test photoinitiators into a 50:50 solution of Ebecryl 648 and TPGDA at 33% concentration. These solutions were then mixed with mixture A by blending with a knife to produce the final ink for testing.

- 10 The inks were printed using an engraved intaglio plate, using a Harry Rochat proofing press and analysed for the amount of cure and fluorescence. The fluorescence of the ink for practical purposes at an excitation of 364nm and 254nm must be less than that emitted by the paper. Fluorescence can be assessed visually under a light emitting at

these wavelengths or by using UV spectrophotometer such as a Perkin Elmer LS50. The inks were cured using a 300W/inch Ga doped, medium pressure mercury lamp, from Fusion UV.

The cure was assessed by contacting a piece of paper onto cured print using a
5 hydraulic ram at 10T spread over a disk with a diameter of 3cm.

The photoinitiators evaluated are listed in Table 2, which also shows final ink formulations and the results of the assessment.

Table 2

Photoinitiator	Mixture A	PI%	50:50 Ebecryl 648 :TPGDA	Rahn RCX-02- 766 amine synergist	Supplier	Fluorescence (excitation 254nm)	Fluorescence (excitation 365nm)	Cure*
Esacure ITX	81.3	3.3	12.9	2.5	Lamberti	Yes (bright blue)	Yes (bright blue)	-1
Lucerin TPO [†]	81.3	3.3	15.4	-	BASF	No	No	+1
Irgacure 819 [†]	81.3	3.3	15.4	-	CIBA	No	No	+2
Benzophenone	81.3	3.3	12.9	2.5	IGM Resins	Yes (Dull green)	Yes (dull green)	-2
Irgacure 369	81.3	3.3	15.4	-	Ciba	Yes	Yes	-2
Diethylthioxanthone	81.3	3.3	12.9	2.5	Lambson	Yes	Yes	-2
Photoinitiator combination 1	81.3	6.3	12.4	-	-	Yes	Yes	+1

Photoinitiator combination 2	81.3	5.4	13.3	-	-	Yes	Yes	+2
Omnipol TX	81.3	3.3	12.9	2.5	IGM Resins	Yes	Yes	-1

*-2 very poor to +2 very good

† acylphosphine oxides according the present invention.

ITX is 2-isopropylthioxanthone

Irgacure 369 is 2 benzyl-2-dimethyl amino-4' morpholinobutyrophenone

5 Irgacure 819 is Bis (2,4,6-trimethylbenzoyl)phenylphosphine oxide

Lucerin TPO is Diphenyl (2,4,6-trimethylbenzoyl)phosphine oxide

Omnipol TX is Poly(oxy-1,4-butandiyl), α -[[[(9-oxo-9H-thioxanthonyl)oxy]acetyl]- ω -[[[(9-oxo-9H-thioxanthonyl)oxy]acetyl]oxy]

Photoinitiator Combination 1


Photoinitiator	%
Esacure ITX	50.00
Lucerin TPO	15.00
Irgacure 369	35.00

Photoinitiator Combination 2

Photoinitiator	%
Esacure ITX	55.6
Irgacure 819	44.4

CLAIMS:


1. An energy curable intaglio printing ink, curing by free radical acrylate chemistry, and including a photoinitiator comprising an acylphosphine oxide, whereby the ink does not fluoresce in at least the visible light wavelength region when exposed to ultraviolet light.
2. A printing ink according to Claim 1, in which said acylphosphine oxide is a compound of formula (I):

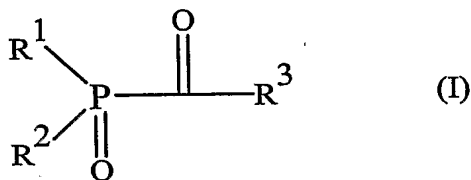

in which:


R^1 and R^2 are independently selected from $\text{C}_1 - \text{C}_{12}$ alkyl groups, $\text{C}_3 - \text{C}_7$ cycloalkyl groups, aryl groups, aralkyl groups, heterocyclic groups having from 3 to 7 ring atoms, of which at least one is a sulphur or nitrogen atom and groups of formula $-\text{COR}^3$;

or R^2 represents a group of formula $-\text{OR}^4$, where R^4 represents a $\text{C}_1 - \text{C}_6$ alkyl group, an aryl group, an aralkyl group or a cationic group or atom, or R^2 represents a group of formula (II):

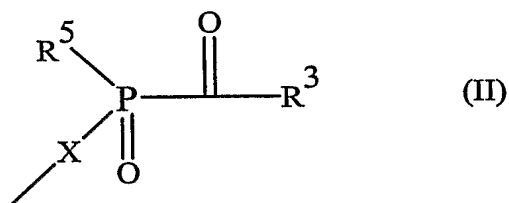


where X represents a $\text{C}_1 - \text{C}_{18}$ alkylene group or a biphenyldiyl group, and R^5 represents any of the groups represented by R^1 or a group of formula $-\text{OR}^4$; and

R^3 represents a $C_1 - C_6$ alkyl group, an aryl group, a heterocyclic group having from 3 to 7 ring atoms, of which at least one is a sulphur or nitrogen atom, or a group of formula (IV):

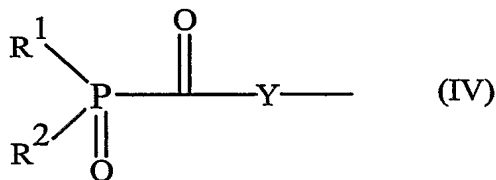

where Y represents a $C_1 - C_{18}$ alkylene group a phenylene group, a cyclohexylene group or a biphenyldiyl group.

3. A printing ink according to Claim 2, in which said acylphosphine oxide is a compound of formula (V):

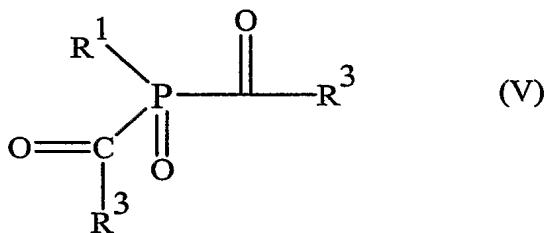

in which:


R^1 represents a $C_1 - C_{12}$ alkyl group, a cyclohexyl group or an aryl group; and

R^3 is as defined in Claim 2.

4. A printing ink according to Claim 3, in which each R^3 is independently selected from phenyl groups and phenyl groups having from 1 to 4 halogen and/or $C_1 - C_6$ alkyl and/or $C_1 - C_6$ alkoxy substituents.

5. A printing ink according to Claim 3 or Claim 4, in which R^1 represents a $C_1 - C_{12}$ alkyl group or a phenyl group which is unsubstituted or has from 1 to 3 $C_1 - C_6$ alkyl or alkoxy substituents.

6. A printing ink according to Claim 2, in which said acylphosphine oxide is a compound of formula (VI):

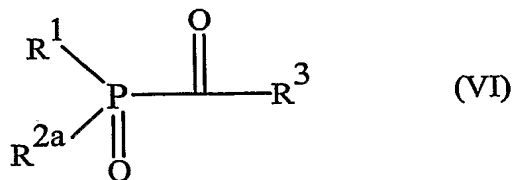


in which:

R^1 and R^3 are as defined in Claim 2; and

R^{2a} represents a $\text{C}_1 - \text{C}_{12}$ alkyl group, a $\text{C}_3 - \text{C}_7$ cycloalkyl group, an aryl group, an aralkyl group, a heterocyclic group having from 3 to 7 ring atoms, of which at least one is a sulphur or nitrogen atom, or a group of formula $-\text{OR}^4$, where R^4 is defined in Claim 2.

7. A printing ink according to Claim 2, in which said acylphosphine oxide is a compound of formula (VII):

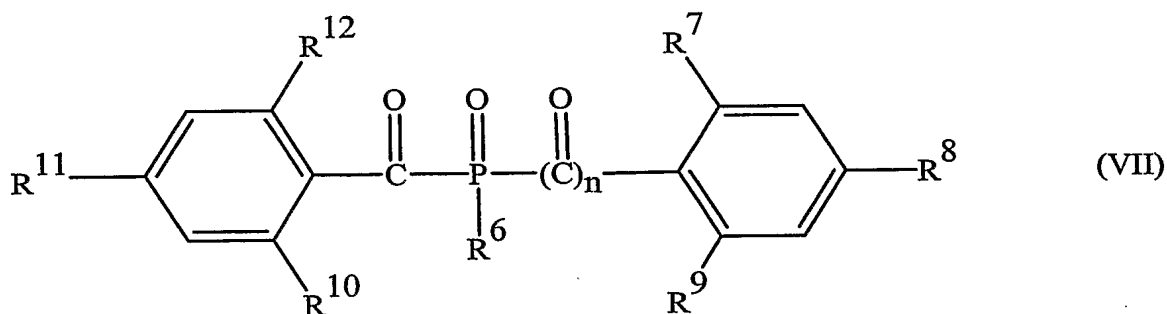

in which:

n is 0 or 1;

R^6 represents a $\text{C}_1 - \text{C}_{12}$ alkyl group, a $\text{C}_1 - \text{C}_6$ alkoxy group, a phenyl group or a phenyl group having from 1 to 4 substituents selected from $\text{C}_1 - \text{C}_6$ alkyl groups,

$\text{C}_1 - \text{C}_6$ alkoxy groups and halogen atoms; and


R^7 , R^8 , R^9 , R^{10} , R^{11} and R^{12} are the same as or different from each other and each represents a hydrogen atom, a $C_1 - C_6$ alkyl group, a $C_1 - C_6$ alkoxy group or a halogen atom.

8. A printing ink according to Claim 2, in which said acylphosphine oxide is 2,4,6-trimethylbenzoyl diphenylphosphine oxide, bis(2,4,6-trimethylbenzoyl)phenyl phosphine oxide, ethyl 2,4,6-trimethylbenzoyl diphenylphosphinate or bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentylphosphine oxide.

9. A method of producing a document, which comprises intaglio printing on a substrate which does not fluoresce in at least the visible region under ultraviolet light using an intaglio printing ink, curing by free radical acrylate chemistry, and which includes a photoinitiator comprising an acylphosphine oxide, and curing the ink by exposure to a source of radiant energy.

10. A method according to Claim 9, in which said radiant energy is ultraviolet.

11. A method according to Claim 9 or Claim 10, in which said acylphosphine oxide is a compound of formula (I):

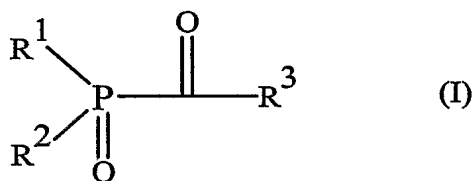


in which:


R^1 and R^2 are independently selected from $C_1 - C_{12}$ alkyl groups, $C_3 - C_7$ cycloalkyl groups, aryl groups, aralkyl groups, heterocyclic groups having from 3 to 7 ring atoms, of which at least one is a sulphur or nitrogen atom and groups of formula $-COR^3$;

or R^2 represents a group of formula $-OR^4$, where R^4 represents a $C_1 - C_6$ alkyl group, an aryl group, an aralkyl group or a cationic group or atom, or R^2 represents a group of formula (II):

23

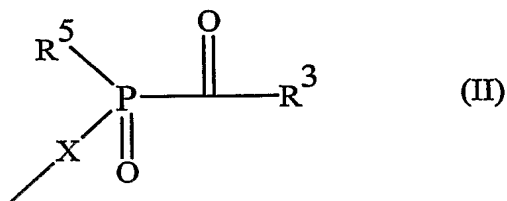


where X represents a C₁ – C₁₈ alkylene group or a biphenyldiyl group, and R⁵ represents any of the groups represented by R¹ or a group of formula –OR⁴; and R³ represents a C₁ – C₆ alkyl group, an aryl group, a heterocyclic group having from 3 to 7 ring atoms, of which at least one is a sulphur or nitrogen atom, or a group of formula (IV):

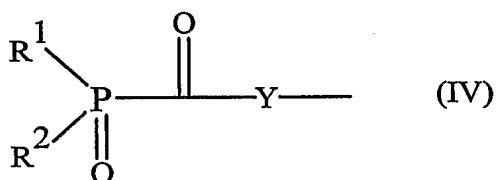

where Y represents a C₁ – C₁₈ alkylene group a phenylene group, a cyclohexylene group or a biphenyldiyl group.

12. A method according to Claim 11, in which said acylphosphine oxide is a compound of formula (V):

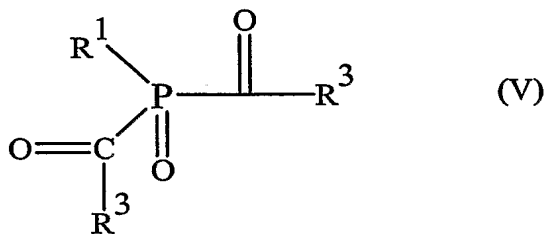

in which:


R¹ represents a C₁ – C₁₂ alkyl group, a cyclohexyl group or an aryl group; and

R³ is as defined in Claim 11.

13. A method according to Claim 12, in which each R^3 is independently selected from phenyl groups and phenyl groups having from 1 to 4 halogen and/or $C_1 - C_6$ alkyl and/or $C_1 - C_6$ alkoxy substituents.

14. A method according to Claim 12 or Claim 13, in which R^1 represents a $C_1 - C_{12}$ alkyl group or a phenyl group which is unsubstituted or has from 1 to 3 $C_1 - C_6$ alkyl or alkoxy substituents.

15. A method according to Claim 11, in which said acylphosphine oxide is a compound of formula (VI):

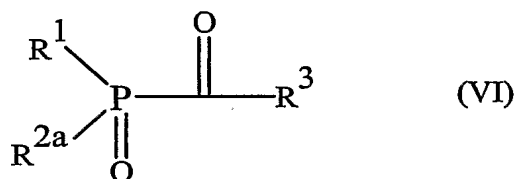


in which:

R^1 and R^3 are as defined in Claim 11; and

R^{2a} represents a $C_1 - C_{12}$ alkyl group, a $C_3 - C_7$ cycloalkyl group, an aryl group, an aralkyl group, a heterocyclic group having from 3 to 7 ring atoms, of which at least one is a sulphur or nitrogen atom, or a group of formula $-OR^4$, where R^4 is defined in Claim 11.

16. A method according to Claim 11, in which said acylphosphine oxide is a compound of formula (VII):

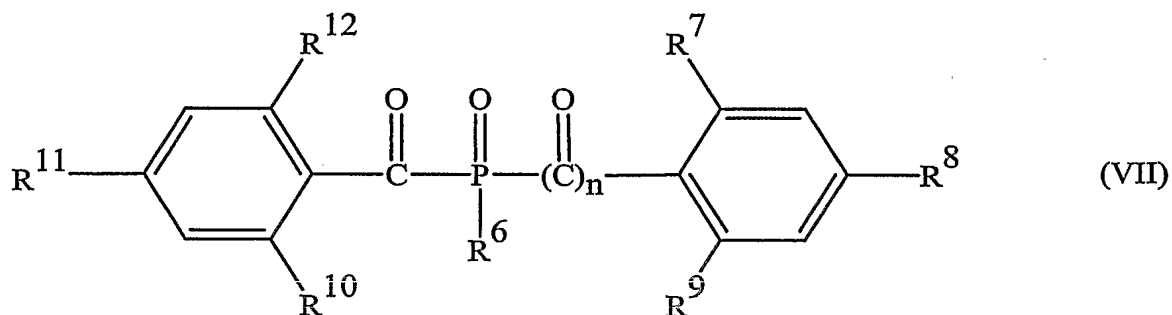

in which:

n is 0 or 1;

R^6 represents a $C_1 - C_{12}$ alkyl group, a $C_1 - C_6$ alkoxy group, a phenyl group or a phenyl group having from 1 to 4 substituents selected from $C_1 - C_6$ alkyl groups, $C_1 - C_6$ alkoxy groups and halogen atoms; and

$R^7, R^8, R^9, R^{10}, R^{11}$ and R^{12} are the same as or different from each other and each represents a hydrogen atom, a $C_1 - C_6$ alkyl group, a $C_1 - C_6$ alkoxy group or a halogen atom.


17. A method according to Claim 11, in which said acylphosphine oxide is 2,4,6-trimethylbenzoyl diphenylphosphine oxide, bis(2,4,6-trimethylbenzoyl)phenyl phosphine oxide, ethyl 2,4,6-trimethylbenzoyl diphenylphosphinate or bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentylphosphine oxide.

18. A method according to any one of Claims 9 to 17, in which the substrate is a paper.

19. A method according to any one of Claims 9 to 18, in which the document is a security document.

20. A method according to Claim 19, in which the security document is a banknote.


21. The use of an acylphosphine oxide of formula (I):

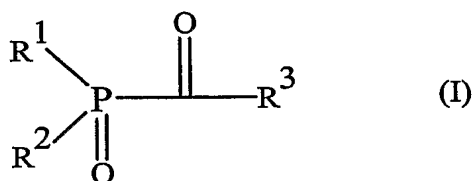


in which:

R^1 and R^2 are independently selected from $C_1 - C_{12}$ alkyl groups, $C_3 - C_7$ cycloalkyl groups, aryl groups, aralkyl groups, heterocyclic groups having from 3 to 7 ring atoms, of which at least one is a sulphur or nitrogen atom and groups of formula $-COR^3$;

or R^2 represents a group of formula $-OR^4$, where R^4 represents a $C_1 - C_6$ alkyl group, an aryl group, an aralkyl group or a cationic group or atom, or R^2 represents a group of formula (II):

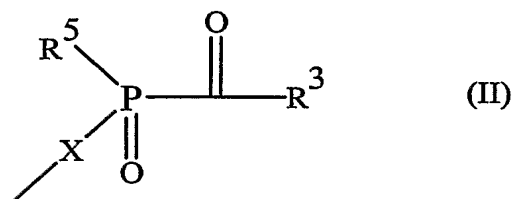

where X represents a $C_1 - C_{18}$ alkylene group or a biphenyldiyl group, and R^5 represents any of the groups represented by R^1 or a group of formula $-OR^4$; and R^3 represents a $C_1 - C_6$ alkyl group, an aryl group, a heterocyclic group having from 3 to 7 ring atoms, of which at least one is a sulphur or nitrogen atom, or a group of formula (IV):

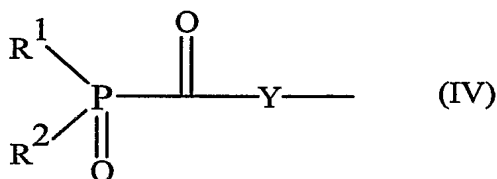

where Y represents a $C_1 - C_{18}$ alkylene group a phenylene group, a cyclohexylene group or a biphenyldiyl group.

as a photoinitiator in an energy curable intaglio printing ink to formulate an intaglio printing ink which does not exhibit fluorescence in the visible light wavelength region when exposed to ultraviolet light.

ABSTRACT:**Photoinitiators For Use In Intaglio Printing Inks**

An intaglio printing ink, curing by free radical acrylate chemistry, which does not fluoresce in at least the visible region under ultraviolet light is prepared by using an acylphosphine oxide as the photoinitiator.

